

RapidFire™ Strobe

Product No. 3961.1 Pull-pin Inflatable PFD Strobe

- > Small, compact, rugged, waterproof; packs inside inflatable life jacket or attaches to standard life vest
- > Provides location lighting to USCG requirements for 6 hours
- > Pull-pin activation: Automatically activates when PFD inflates or if manually pulled
- > Adjustable flash shield for optimum eye protection
- > Pull-pin lanyard clips to bottom of inflation chamber
- > Light test feature with "Test Key" to ensure readiness—can be tested many times
- > Easy to mount—fits on inflation tube via O Ring which will not damage inflation tube, or fits on any strap of conventional life jacket
- > "Tamper Tab" breaks to indicate light has been activated
- > Long term storage lithium battery—10-year storage life (recommended replacement 5 years from date of purchase—write month/year of replacement date on case at time of purchase)
- > Operating life—approximately 8 hours continuous at -20°C (-4°F)

Size: 3.1 L x 1.8 W x 1.6 D in (7.9 L x 4.6 W x 4.1 D cm)

Weight: 2.3 oz (65 g)

Material: UV stabilized composite polymer

Color: Hi-Viz Yellow

Operation: Pull-pin activation; automatic on some vests, manual activation when pulled by hand

Waterproof: Up to 10 ft (3.1 m)

Beam Angle: Omnidirectional 360°

Visibility: Over 1 mile (1.6 km)

Flash Rate: 60 flashes per minute ± 10 for 4 hours; rate slows to 20/min during last 4 hours

Lamp: Xenon flash tube

Battery Type: Lithium; 10-year storage life (5-year replacement life)


Limited Warranty: 1 year

Carton Dimensions: 9.5 x 12.0 x 6.0 in (24.0 x 31.0 x 15.0 cm)

Units per Carton: 12

Carton Weight: 3.4 lbs (1.35 kg)

Operational Life: Approximately 8 hours continuous at -20°C (-4°F)

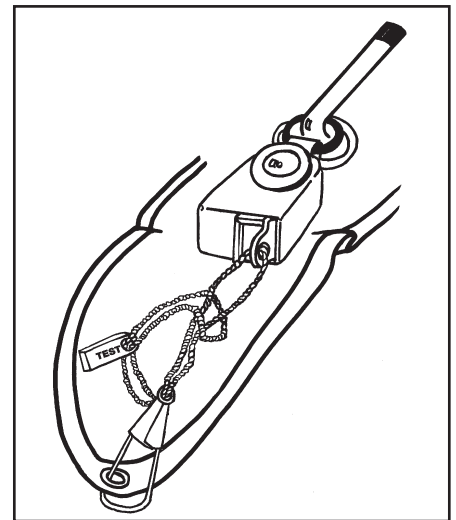

ACR Electronics, Inc.

5757 Ravenswood Road
Fort Lauderdale, FL 33312, U.S.A.
Tel Worldwide: +1(954) 981-3333
Fax: +1(954) 983-5087
www.acrelectronics.com

A Chelton Group Company