



# PoE Tester

## PowerDsine Power over Ethernet Tester

### Check your RJ-45 outlet for power using the PowerDsine PoE Tester

The Power over Ethernet (PoE) Tester, connected to an RJ-45 outlet, tests the cabling infrastructure for the presence of power, either IEEE802.3af standard-compliant or pre-standard. The PoE Tester identifies the existence and type of Power Sourcing Equipment (either Endspan or Midspan) in your network.

### Identify the Power Source:

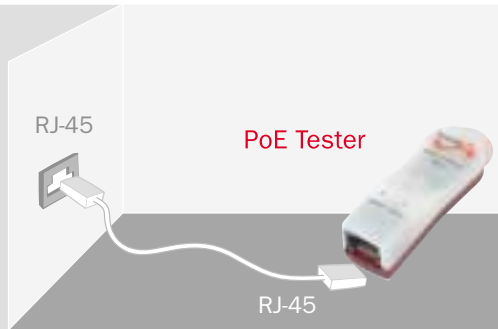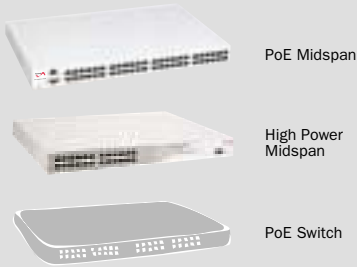

## Features

- Tests RJ-45 outlet for Power over Ethernet existence
- Indicates the type of power source
- Detects:
  - ✓ IEEE 802.3af midspans and switches
  - ✓ Cisco pre-standard in-line switches
  - ✓ High Power midspans
- Compact design specifically tailored for system integrators and installers
- Plug and play, simple to use













The Power over Ethernet Pioneers



# PoE Tester

PowerDsine Power over Ethernet (PoE) Tester

## Identify the Power Source:

Midspan LED	Endspan LED	Indication
		No power indication
		Standard 802.3af Midspan*
		Standard 802.3af Switch
 (Blinks every 7-9 Sec)		Cisco Non-standard Switch
		PowerDsine High Power Midspan

\* Few PoE switches are designed to transmit power on the spare pairs. In these cases, the Midspan LED will be illuminated.

## Ordering Information

Order Number	Description
PD-TESTER	Power over Ethernet Tester for RJ-45 Outlet

## Specifications:

<b>Input</b>	RJ-45 connector Category 5/5e/6 cable with RJ-45 connectors
<b>Dimensions</b>	(H)0.87x(W)0.94x(D)2.99 in (H)22x(W)24x(D)76 mm
<b>Weight</b>	15 g
<b>Indicators</b>	Midspan LED display (Blue) Endspan LED display (Blue)
<b>Environmental Conditions</b>	Operating Ambient Temperature: 32° to 104°F (0 to 40°C) Operating Humidity: Max. 90%, non-condensing Storage Temperature: -4° to 158°F (-20° to 70°C) Storage Humidity: Max. 95%, non-condensing Operating Altitude: -1000 to 10,000 ft. (-304.8 to 3048 m)
<b>Regulatory</b>	Compliance CE



[www.powerdsine.com](http://www.powerdsine.com)

### International Headquarters

PowerDsine Ltd.  
1 Hanagar St.,  
P.O.Box 7220  
Hod Hasharon 45421  
Israel  
Tel: +972-9-7755100  
Fax: +972-9-7755111  
[sales@powerdsine.com](mailto:sales@powerdsine.com)

### North America

PowerDsine, Inc.  
1865 New Highway  
Farmingdale, NY 11735  
USA  
Tel: +1-631-756-4680  
Fax: +1-631-756-4691  
[sales@powerdsineusa.com](mailto:sales@powerdsineusa.com)

### Europe

PowerDsine UK  
Lakeside House  
1 Furzeground Way  
Stockley Park, Uxbridge  
UB11 1BD, United Kingdom  
Tel: +44 (0) 208 622 3107  
Fax: +44 (0) 208 622 3200  
[uk@powerdsine.com](mailto:uk@powerdsine.com)